



SPECIFICATIONS

MODEL		CS2530 Cab
ENGINE		
Model		KIOTI 3L123
Type		KIOTI 3 Cylinder, Water-Cooled Diesel
Engine Gross	HP (kW)	24.5 (18.3)
PTO	HP (kW)	19.3 (14.3)
Rated Revolution	rpm	3,000
Displacement	cu. in. (cc)	75.2 (1,233)
Fuel Tank Capacity	gal. (ℓ)	6.6 (25.5)
DRIVE TRAIN		
Transmission		2-Range Hydrostatic
Speeds		Infinite
Differential Lock		Rear Standard
Brake		Wet Disc
PTO		Electric / Hydraulic
Rear PTO	rpm	540
Mid PTO	rpm	2,200
4WD Type		Mechanical
HYDRAULIC SYSTEM		
Pump		Open Center
Pump Capacity (Max. Flow Rate)	gpm (L/min)	Steering 2.0 (7.7) / Imp. 4.9 (18.7)
3-Point Hitch		Category I
Maximum Lifting Capacity*	lb. (kg)	700 (317.5)
Hydraulic Lift Control System		Mechanical
Standard Remote Vales		1 (Optional)
TIRE SIZE		
Front AG. (Turf, Industrial)		18 x 8.5
Rear AG. (Turf, Industrial)		26 x 12-12
TRAVELING SPEEDS		
Forward	mph (km/h)	0~9.0 (0~14.5)
Reverse	mph (km/h)	0~6.2 (0~9.9)
DIMENSIONS		
Overall Length (Includes 3-pt Hitch)	in. (mm)	102.9 (2,613.7)
Overall Width (Minimum Tread)	in. (mm)	48.3 (1,226.8)
Overall Height (From Top of Cab)	in. (mm)	82.6 (2,098.0)
Wheelbase	in. (mm)	55.1 (1,399.5)
Min. Ground Clearance	in. (mm)	6.4 (162.0)
Min. Turning Radius (With Brake)	ft. (m)	100.0 (2,540.0)
Weight with AG. Tires	lb. (kg)	2,233.3 (1,013.0)

* @ 24" aft of hitch

NOTE: specifications and design are subject to change without notice.




FRONT END LOADER SPECIFICATIONS

MODEL		SL2530 (Non-Self Leveling)	SL2530 (Self Leveling*)
Maximum Lift Height (to Pivot Point)	in. (mm)	70.9 (1,800.0)	71.1 (1,807.0)
Clearance w/Bucket Dumped (@ 45°)	in. (mm)	50.4 (1,280.2)	51.6 (1,310.0)
Reach at Maximum Height	in. (mm)	28.3 (718.0)	27.4 (695.0)
Reach w/Bucket on Ground	in. (mm)	54.2 (1,377.0)	54.4 (1,382.0)
Maximum Rollback Angle	deg.	27	42
Digging Depth Below Grade	in. (mm)	8.1 (205.0)	7.5 (190.0)
Overall Height (In Carry Position)	in. (mm)	43.4 (875.0)	37.4 (905.0)
Depth of Bucket (To Back of Inner Shell)	in. (mm)	17.0 (432.0)	17.0 (432.0)
Bucket Size Available (QA)	in. (mm)	48.0 (1,219.2)	48.0 (1,219.2)
Height of Bucket	in. (mm)	18.6 (473.0)	18.6 (473.0)
Length of Bucket (To Pivot Pin)	in. (mm)	22.0 (559.0)	22.0 (559.0)
Lift Capacity to Full Height (At Pivot Pins)	lb. (kg)	871.0 (395.0)	913.0 (414.0)
Breakout Force (At Pivot Pins)	lb. (kg)	1,299.0 (589.0)	1,281.0 (581.0)
Relief Setting (Loader Control Valve)	psi (Kgf)	1,849~1,920 (130~135)	1,849~1,920 (130~135)
Bucket Capacity (Heaped)	ft. ³ (m ³)	6.70 (0.19)	6.70 (0.19)

NOTE: specifications and design are subject to change without notice.

FRONT END LOADER

The KIOTI SL2530 front-end loader is available in both self-leveling and non-self-leveling configurations, offering operators the flexibility to choose the best option for their needs. Equipped with a quick-attach system for rapid attachment changes, both configurations provide reliable performance for light-duty tasks such as loading, unloading, grading and material handling.

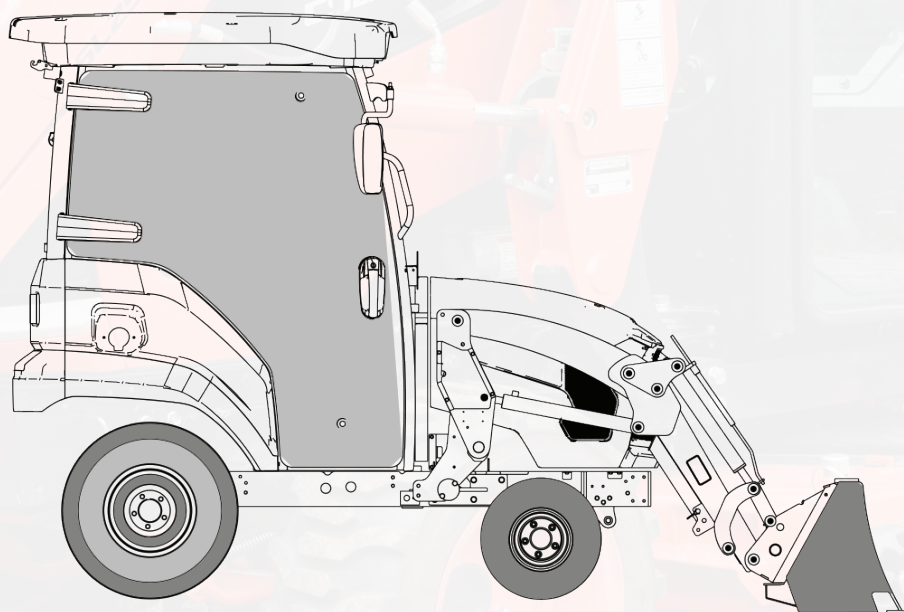

STANDARD EQUIPMENT

- Power Steering
- Tilt Steering
- Rear Differential Lock
- Rear PTO
- Mid PTO
- Wet Multi Disc Brakes
- HVAC
- Joystick Valve
- 4 Wheel Drive
- Cruise Control
- PTO Shield
- SMV Sign
- Parking Brake
- Headlights
- Warning / Signal Lamps
- 12V Power Outlet & USB Socket
- Suspension Seat with Arm Rests
- KIOTI Connect Capable
- Horn
- Fixed Drawbar
- Cup Holder
- Side View Mirrors
- Rear View Mirror
- Front Wiper
- Sun Visor
- Front Work Lights
- Rear Window Defrost
- Rear Wheel Weights

OPTIONAL EQUIPMENT

- 7 Pin Socket
- Beacon Light
- Bluetooth Radio
- LCD Monitor
- 3rd Function
- Front Grille Guard
- Rear Window Wiper
- Rear Work Lights
- Hydraulic Filter Guard
- Towing Hook
- Back Up Camera
- Rear Hydraulic Valve
- Front Weight



SPECIFICATIONS

MODEL	CS2230H		CS2530H
ENGINE			
Model		KIOTI 3L123	
Type		KIOTI 3 Cylinder, Water-Cooled Diesel	
Engine Gross	HP (kW)	21.0 (15.7)	24.5 (18.3)
PTO Horse Power	HP (kW)	16.7 (12.5)	19.3 (14.4)
Rated Revolution	rpm	3,000	
Displacement	cu. in. (cc)	75.2 (1,233.0)	
Fuel Tank Capacity	gal. (ℓ)	6.6 (25.5)	
DRIVE TRAIN			
Transmission		2 Range Hydrostatic	
Speeds		Infinite	
Differential Lock		Rear Standard	
Brake		Wet Disc	
PTO Type		Independent	
Rear PTO	rpm	540	
Mid PTO	rpm	2,200	
4WD Type		Mechanical	
HYDRAULIC SYSTEM			
Pump		Open Center	
Pump Capacity (Max. Flow Rate)	gpm (L/min)	Steering 2.0 (7.7) / Imp 4.9 (18.7)	
3-Point Hitch		Category I	
Maximum Lifting Capacity*	lb. (kg)	700.0 (317.5)	
Hydraulic Lift Control System		Mechanical	
Standard Remote Vales		1 (Optional)	
TIRE SIZE			
Front AG. (Turf, Industrial)		18x8.5-10	
Rear AG. (Turf, Industrial)		26x12-12	
TRAVELING SPEEDS			
Forward	mph (km/h)	0 ~ 8.99 (0 ~ 14.47)	
Reverse	mph (km/h)	6.15 (0 ~ 9.90)	
DIMENSIONS			
Overall Length (Includes 3-pt Hitch)	in. (mm)	88.6 (2,250.4)	
Overall Width (Minimum Tread)	in. (mm)	48.8 (1,239.5)	
Overall Height (From Top of ROPS)	in. (mm)	57.6 (1,463.0)	
Wheelbase	in. (mm)	55.1 (1,399.5)	
Min. Ground Clearance	in. (mm)	6.4 (162.0)	
Min. Turning Radius (With Brake)	in. (mm)	100.0 (2,540.0)	
Weight with AG. Tires	lb. (kg)	1,735.0 (787.0)	

* @ 24" aft of hitch

NOTE: specifications and design are subject to change without notice.




LOADER SPECIFICATIONS

MODEL		SL2530 (Non-Self Leveling)	SL2530 (Self Leveling*)
Maximum Lift Height (to Pivot Point)	in. (mm)	70.9 (1,800.0)	71.1 (1,807.0)
Clearance w/Bucket Dumped (@ 45°)	in. (mm)	50.4 (1,280.2)	51.6 (1,310.0)
Reach at Maximum Height	in. (mm)	28.3 (718.0)	27.4 (695.0)
Reach w/Bucket on Ground	in. (mm)	54.2 (1,377.0)	54.4 (1,382.0)
Maximum Rollback Angle	deg.	27	42
Digging Depth Below Grade	in. (mm)	8.1 (205.0)	7.5 (190.0)
Overall Height (in Carry Position)	in. (mm)	43.4 (875.0)	37.4 (905.0)
Depth of Bucket (to Back of Inner Shell)	in. (mm)	17.0 (432.0)	17.0 (432.0)
Bucket Size Available (QA)	in. (mm)	48.0 (1,219.2)	48.0 (1,219.2)
Height of Bucket	in. (mm)	18.6 (473.0)	18.6 (473.0)
Length of Bucket (to Pivot Pin)	in. (mm)	22.0 (559.0)	22.0 (559.0)
Lift Capacity to Full Height (at Pivot Pins)	lb. (kg)	871.0 (395.0)	913.0 (414.0)
Breakout Force (at Pivot Pins)	lb. (kg)	1,299.0 (589.0)	1,281.0 (581.0)
Relief Setting (Loader Control Valve)	psi (Kgf)	1,849~1,920 (130~135)	1,849~1,920 (130~135)
Bucket Capacity (Heaped)	ft. ³ (m ³)	6.70 (0.19)	6.70 (0.19)

NOTE: specifications and design are subject to change without notice.

FRONT END LOADER

The KIOTI SL2530 front-end loader is available in both self-leveling and non-self-leveling configurations, offering operators the flexibility to choose the best option for their needs. Equipped with a quick-attach system for rapid attachment changes, both configurations provide reliable performance for light-duty tasks such as loading, unloading, grading and material handling.

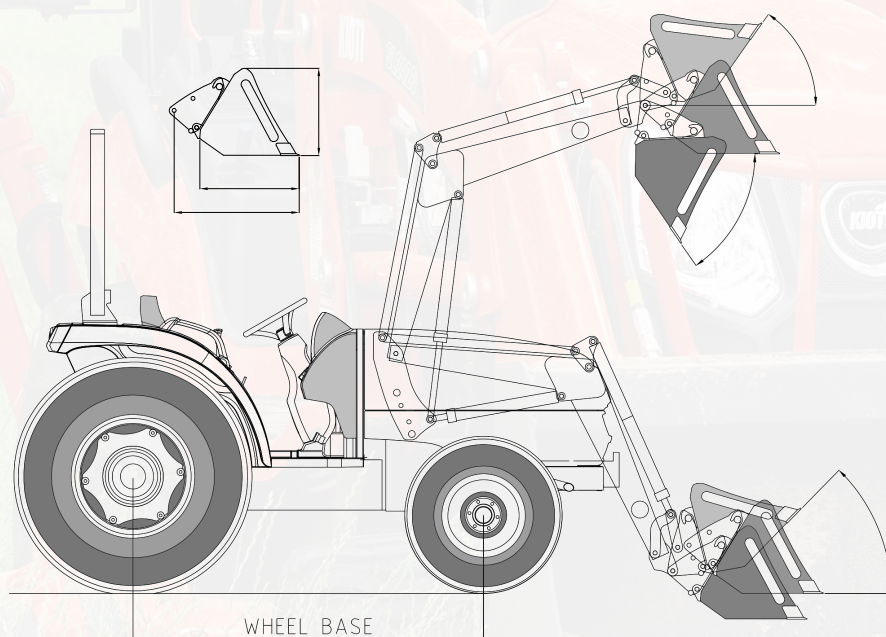

STANDARD EQUIPMENT

- Power Steering
- Tilt Steering
- Rear Differential Lock
- Rear PTO
- Mid PTO
- Wet Multi Disc Brakes
- HVAC
- Joystick Valve
- 4 Wheel Drive
- Cruise Control
- PTO Shield
- SMV Sign
- Parking Brake
- Headlights
- Warning / Signal Lamps
- 12V Power Outlet & USB Socket
- Suspension Seat with Arm Rests
- KIOTI Connect Capable
- Horn
- Fixed Drawbar
- Cup Holder
- Side View Mirrors
- Rear View Mirror
- Front Wiper
- Sun Visor
- Front Work Lights
- Rear Window Defrost
- Rear Wheel Weights

OPTIONAL EQUIPMENT

- 7 Pin Socket
- Beacon Light
- Bluetooth Radio
- LCD Monitor
- 3rd Function
- Front Grille Guard
- Rear Window Wiper
- Rear Work Lights
- Hydraulic Filter Guard
- Towing Hook
- Back Up Camera
- Rear Hydraulic Valve
- Front Weight